

Digital Crane Scale




XZ Series

Unit:mm



IR
Remote Control

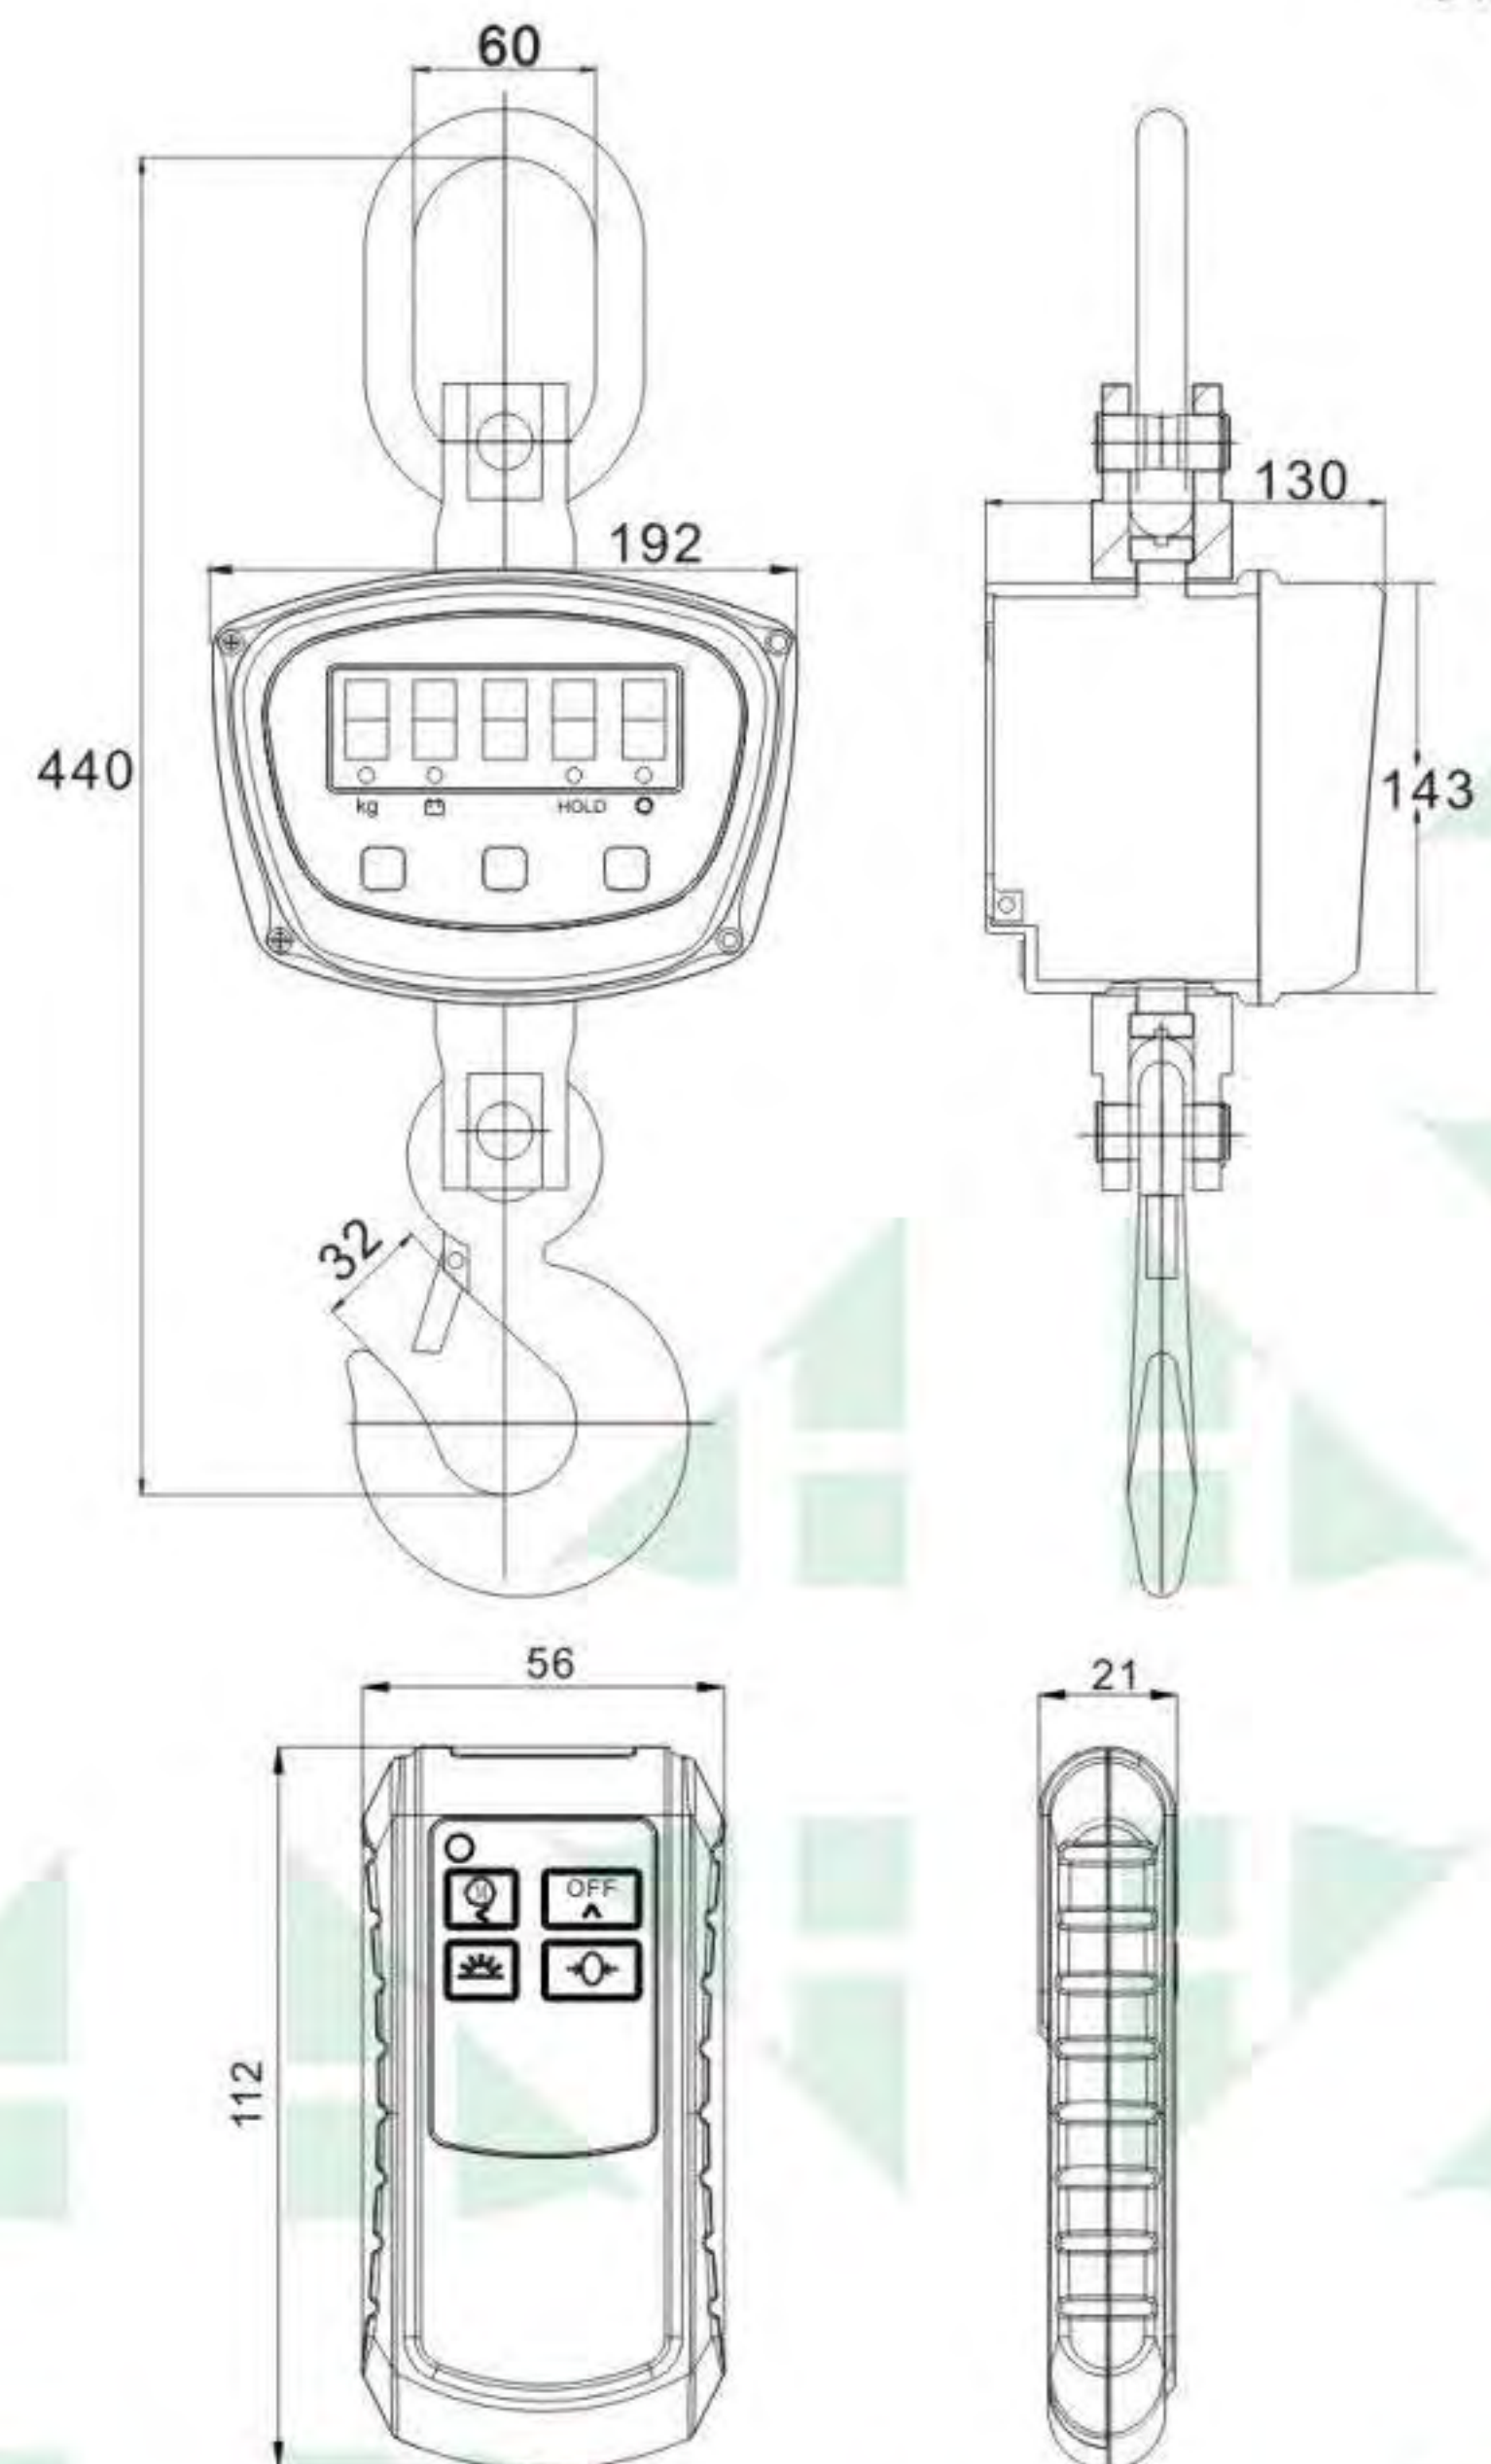

kN
lb kg
Lb/kg/kN
selectable

Applicable in
day and night

Built-in beeper



6V/3.2Ah
battery



Technical Parameter

Accuracy Ⅲ OIML R76

Time to Stable Reading ≤8s

Maximum Safe Load 125%F.S.

Limited Overload 400%F.S.

Overload Alarm 100%F.S.+9e

Surrounding -20℃ ~ 60℃


Operating Temperature -10℃ ~ 40℃

Max Capacity	Division	Weight
500kg	0.2/0.1kg	5kg
1000kg	0.5/0.2kg	5kg
1500kg	0.5/0.2kg	5kg
2000kg	1.0/0.5kg	5kg

Features

- Microdiecasting aluminum-magnesium alloy housing light weight, anti-dust and anti-magnetic
- 360°swivel shackle & hook
- Quick-install battery design makes it easy to replace the battery
- Super bright 5 digit red LED display with 25 mm letter height
- High definition FSTN display, 5 digit 20 mm LCD display with backlighting
- Division and unit conversion switch

LCD Display

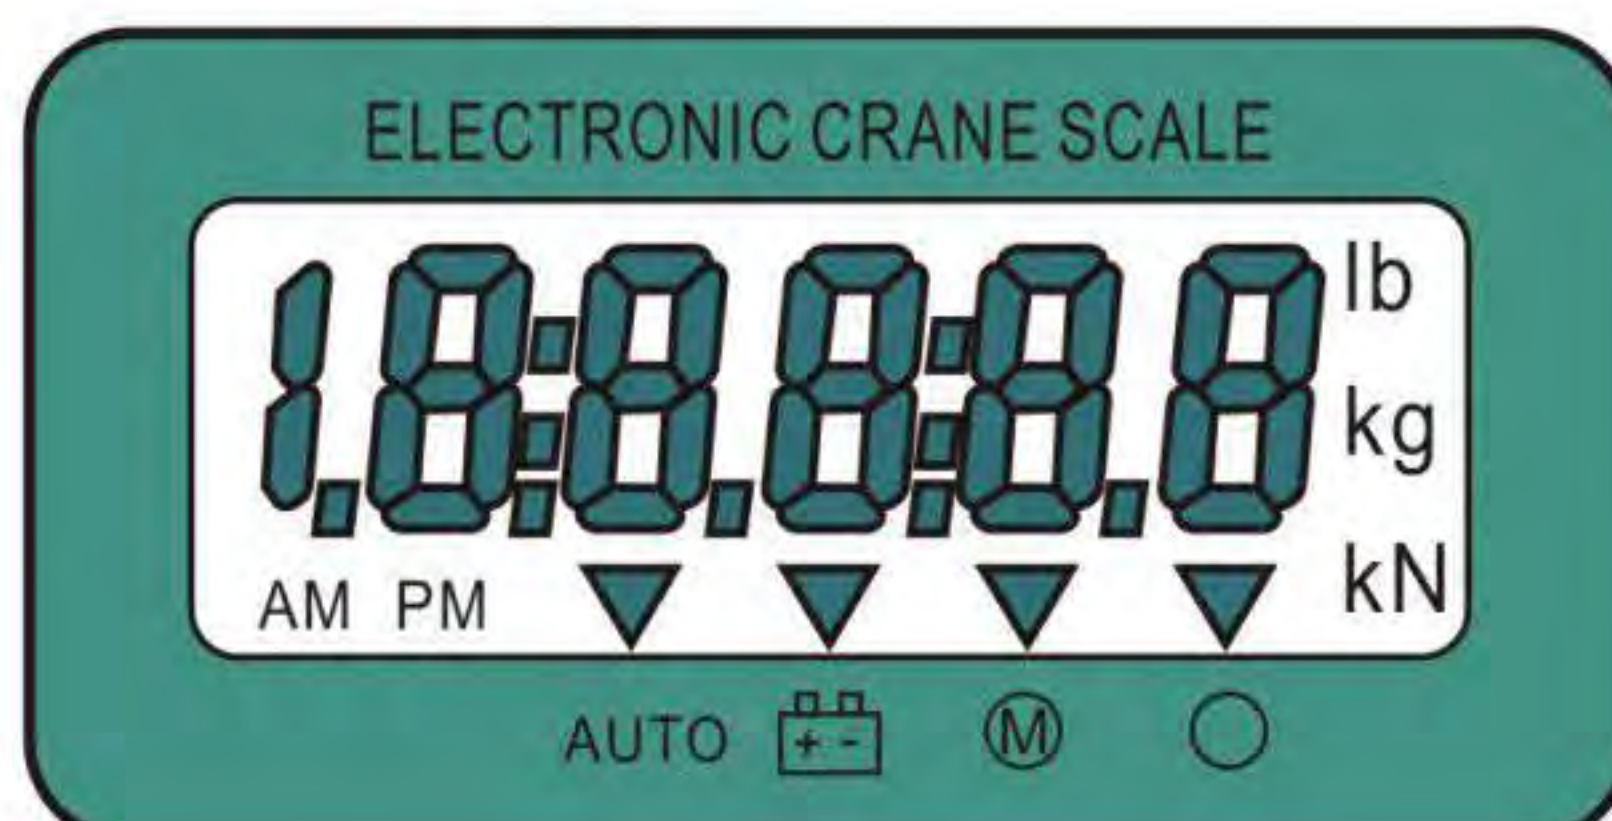

LED Display

